



AZİZ BORU

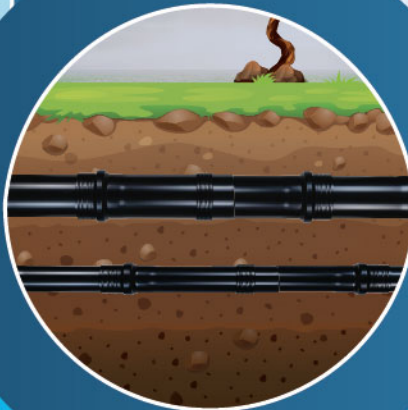


OUR PRODUCTS



HARD ALLOY ALUMINIUM TUBE

2

114.3 mm Outer Diameter



HARD ALLOY ALUMINIUM TUBE

3


165.1 mm Outer Diameter



HARD ALLOY ALUMINIUM TUBE

4


219.1 mm Outer Diameter



HARD ALLOY ALUMINIUM TUBE

5


273 mm Outer Diameter



HARD ALLOY ALUMINIUM TUBE

6

323.9 mm Outer Diameter




HARD ALLOY ALUMINIUM TUBE

114.3 mm Outer Diameter

Feature	Value
Outer Diameter (mm)	114.3
Wall Thickness (mm)	2
Burst Pressure (Bar)	107.4
Continuous Working Pressure (Bar)	25
Weight (kg)	2.69
Thermal Conductivity (W/mK)	160-210
Thermal Expansion Coefficient (1/K)	23.4×10^{-6}
Corrosion Resistance	High
Operating Temperature Range (°C)	-50°C & 175°C

- Light
- Quick Assembly
- Fast Delivery Time
- Easy Shipping
- Recyclable Alloy
- Production in Desired Color

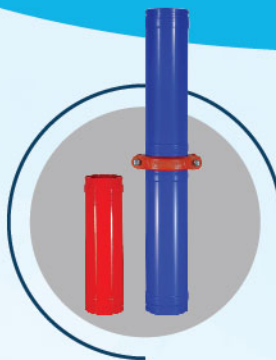

HARD ALLOY ALUMINIUM TUBE

165.1 mm Outer Diameter

Feature	Value
Outer Diameter (mm)	165.1
Wall Thickness (mm)	2.5
Burst Pressure (Bar)	92.1
Continuous Working Pressure (Bar)	25
Weight (kg)	4.81
Thermal Conductivity (W/mK)	160-210
Thermal Expansion Coefficient (1/K)	23.4×10^{-6}
Corrosion Resistance	High
Operating Temperature Range (°C)	-50°C & 175°C

Light •


Easy Shipping •

Quick Assembly •

Recyclable Alloy •

Fast Delivery Time •

Production in Desired Color •



HARD ALLOY ALUMINIUM TUBE

219.1 mm Outer Diameter

Feature	Value
Outer Diameter (mm)	219.1
Wall Thickness (mm)	3
Burst Pressure (Bar)	88.3
Continuous Working Pressure (Bar)	25
Weight (kg)	6.35
Thermal Conductivity (W/mK)	160-210
Thermal Expansion Coefficient (1/K)	23.4×10^{-6}
Corrosion Resistance	High
Operating Temperature Range (°C)	-50°C & 175°C

- Light
- Quick Assembly
- Fast Delivery Time
- Easy Shipping
- Recyclable Alloy
- Production in Desired Color



HARD ALLOY ALUMINIUM TUBE

273 mm Outer Diameter

Feature	Value
Outer Diameter (mm)	273
Wall Thickness (mm)	3.5
Burst Pressure (Bar)	82.4
Continuous Working Pressure (Bar)	25
Weight (kg)	8.71
Thermal Conductivity (W/mK)	160-210
Thermal Expansion Coefficient (1/K)	23.4×10^{-6}
Corrosion Resistance	High
Operating Temperature Range (°C)	-50°C & 175°C

Light •

Easy Shipping •

Quick Assembly •

Recyclable Alloy •

Fast Delivery Time •

Production in Desired Color •



HARD ALLOY ALUMINIUM TUBE

323.9 mm Outer Diameter

Feature	Value
Outer Diameter (mm)	323.9
Wall Thickness (mm)	4
Burst Pressure (Bar)	78.4
Continuous Working Pressure (Bar)	25
Weight (kg)	11.45
Thermal Conductivity (W/mK)	160-210
Thermal Expansion Coefficient (1/K)	23.4×10^{-6}
Corrosion Resistance	High
Operating Temperature Range (°C)	-50°C & 175°C

- Light
- Quick Assembly
- Fast Delivery Time
- Easy Shipping
- Recyclable Alloy
- Production in Desired Color



COMMUNICATION



ADRESS:

Acidere Org. Ind. Zone Atatürk Boulevard
Number: 41 Sarıçam / Adana



PHONE

+90 (322) 394 32 97

+90 (537) 335 21 98



MAIL

mekaline@mekaline.com.tr



WEB

azizboru.com